QG series

QG40N-series

QG40N-KAXYh-1,5-AI-CM-UL

Acceleration sensor

2 axis horizontal mounting

Programmable device
Output: 4 - 20 mA

Measuring range programmable between 0,1 g and 16 g

Measuring range
Factory defaults: ± 1,5 g



General specifications 12315, v20180201	
Housing	Plastic injection molded housing (Arnite T06 202 PBT black)
Dimensions (indicative)	40x40x25 mm
Mounting	Included: 2x M3x25 mm zinc plated steel pozidrive pan head screws, self-tapping (PZ DIN 7500C)
Ingress Protection (IEC 60529)	IP67
Relative humidity	0 - 100%
Weight	approx. 45 gram
Supply voltage	10 - 30 V dc
Polarity protection	Yes
Current consumption	⩽ 15 mA (excluding output signal)
Operating temperature	-40 .. +85 °C
Storage temperature	-40 .. +85 °C
Measuring range	Factory defaults: ± 1,5 g
Centering function	Yes (12 mA = 0 G), range: ±5°
Frequency response (-3dB)	0 - 50 Hz
Accuracy (typ. and/or 2σ)	overall 0,04 g typ.
Offset error	< ± 0,3% F.S. (after zeroing)
Non linearity	< ± 0,3% F.S.
Sensitivity error	< ± 1%
Resolution	0,002 g
Temperature coefficient	± 0,5 mg/K typ.
Max mechanical shock	10.000 g
Output	4 - 20 mA
Output load	Rload ⩽ (50*Vs-300) [Ω] (Eg: Vs = 24 V: Rload ⩽ 900 Ω)
Short circuit protection	Yes (max 10 s)
Output refresh rate	3 ms
Programming options	by optional QG40N-configurator (measuring range, filtering)


QG series

QG40N-KAXYh-1,5-AI-CM-UL

Iout = 12 + 5,33*g [mA]
clipping outside measuring range

Zeroing: eliminate mech. offsets
Connect zeroing input to ground (>0,5sec) within 1 min. after power up. Normally the zeroing input should be left unconnected.

Transfer characteristic

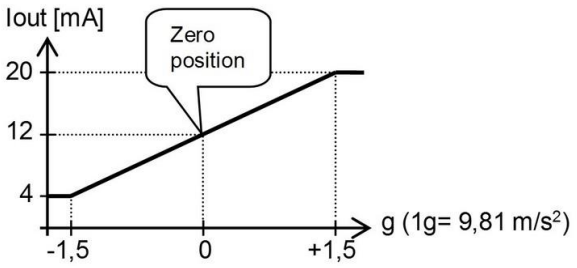


0 g when no acceleration applied

Horizontal mounting:
1-axis or 2-axis usage

Connect output-X and/or output-Y according the plot at the right.

Upside down mounting possible (sensor-nose down)


Measurement orientation

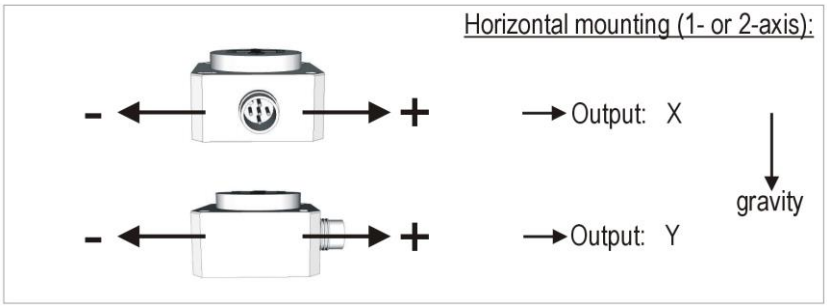

Connectivity (length ±10%)

Connection	M12 5p male connector (Glass fibre reinforced grade, contacts CuZn pre-nickeled galv. Au)
Wire / pin coding	


Pin 1:	+ Supply Voltage
Pin 2:	output Y
Pin 3:	Gnd
Pin 4:	output X
Pin 5:	zeroing



If connected with M12 F (accessoire sold by DIS):

Brown:	'+ Supply Voltage
White:	output Y
Blue:	Gnd
Black:	output X
Green/yellow:	zeroing

Mechanical dimensions (indicative only)

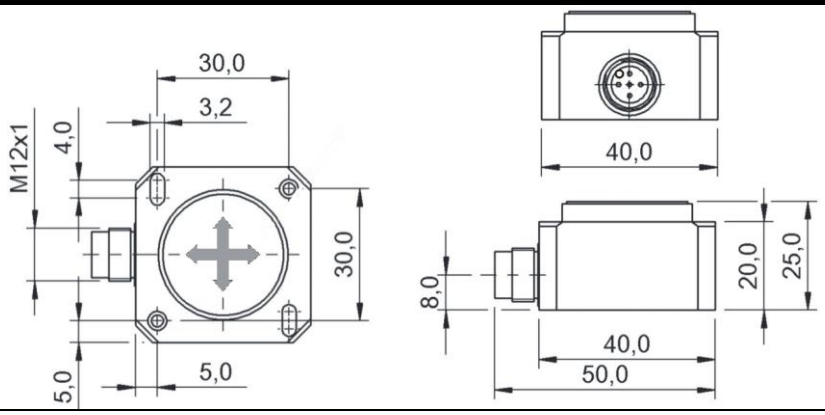

QG40N-KAXYh-1,5-AI-CM-UL

Intended use, UL, Remarks

QG series sensors are intended to measure inclination/acceleration/tilt. Flawless function (acc. spec.) is ensured only when used within specifications. This device is not a safety component acc. to EU Machine Directive (ISO13849). For full redundancy two devices can be used. Modifications or non-approved use will result in loss of warranty and void any claims against the manufacturer.

UL File number: E312057. UL & c-UL listed product (UL508 standards UL60947-5-2 & CSA-C22,2 No.14)
Product Identity / Category Code Number (CCN): Industrial Control Equipment / NRKH & NRKH7
Enclosure / Temperature rating: Enclosure type 1 / Temperature -40° . .+85 °C
Electrical rating: Intended to be used with a Class 2 power source in accordance with UL1310
Electrical ratings: max. input Voltage 30V dc, max. current 500mA
Accessory Cable Assembly: Any UL-listed (CYJV/7) mating connector with mechanical locking, wire thickness of at least 30 AWG (0,05 mm^2), recommenced ≤23 AWG (≥0,25 mm^2)

As this device is accelerometer-based the sensor is inherent sensitive for accelerations/vibrations. Application specific testing must be carried out to check whether this sensor will fulfil your requirements.